

A modern office interior with glass partitions and a white text box overlay. The background shows a clean, professional environment with a blue carpet, a dark coffee table, and a brown sofa. The text box is centered and contains the following text:

KLEFER

Sill

Whether it is a cargo lift or a passenger elevator, KLEFER offers tailored solutions in terms of sill use, to meet your demands. Made of durable materials such as stainless steel, aluminum, or solid steel KLEFER sill options are designed to endure constant use and withstand the daily traffic.

Contact us today, to discuss your specific requirements.


Sill

Whether it is a cargo lift or a passenger elevator, KLEFER offers tailored solutions in terms of sill use, to meet your demands. Made of durable materials such as stainless steel, aluminum, or solid steel KLEFER sill options are designed to endure constant use and withstand the daily traffic.


Contact us today, to discuss your specific requirements.

K L E F E R


40/10 landing doors

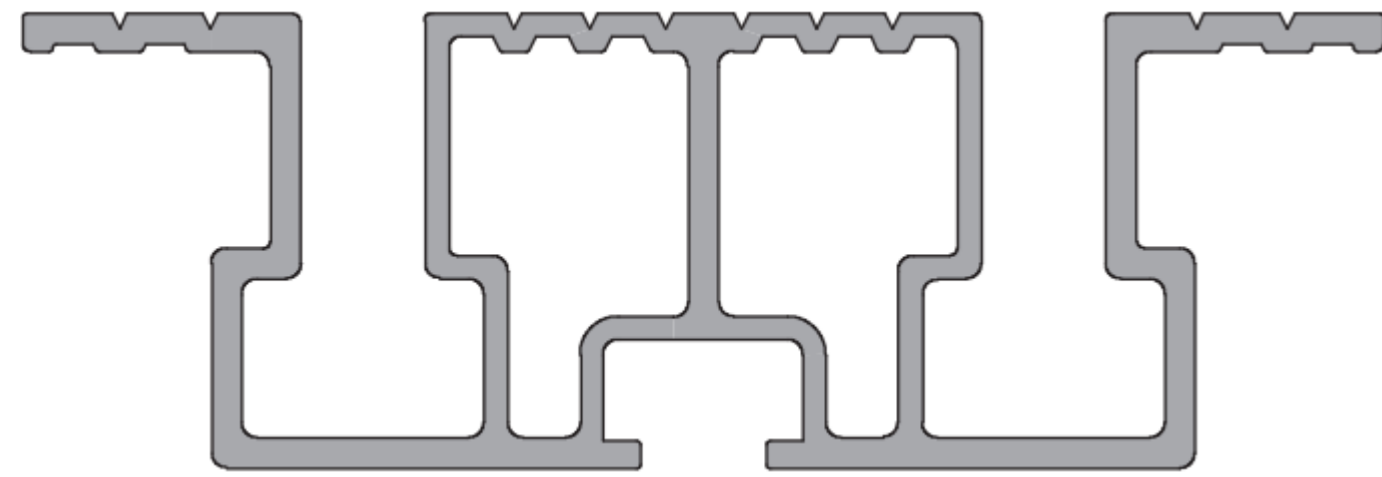

Aluminum

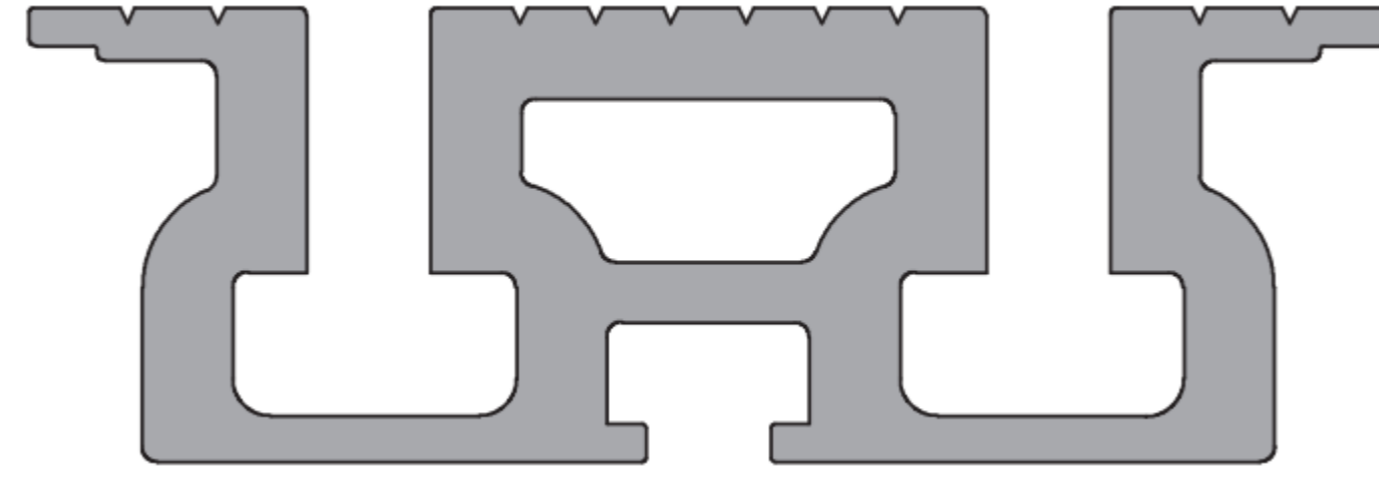

Reinforced Aluminum

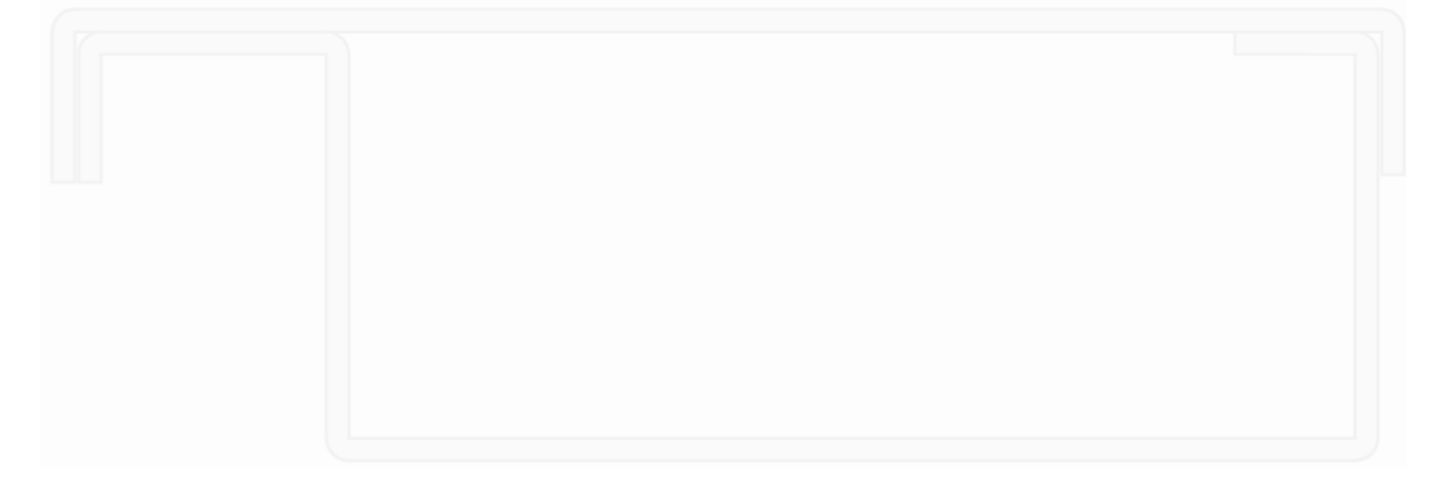


Concealed



Heated Sill



Dust Holes



Total Weight: 1200 kgs




Load in Support point: 300 kgs




Heated Sill*



Dust Holes



Total Weight: 4800 kgs



Load in Support point: 1200 kgs



Heated Sill



Dust Holes



Total Weight: kgs



Load in Support point: kgs


*Not available for c2

*Recommended use. The specified values are about the weight that the sills can support, on their weakest points (excluding their support).The recommended weight do not exercise any elastic deformation on the sill

*The total loadings is divided in four points

K L E F E R

40/10 landing doors

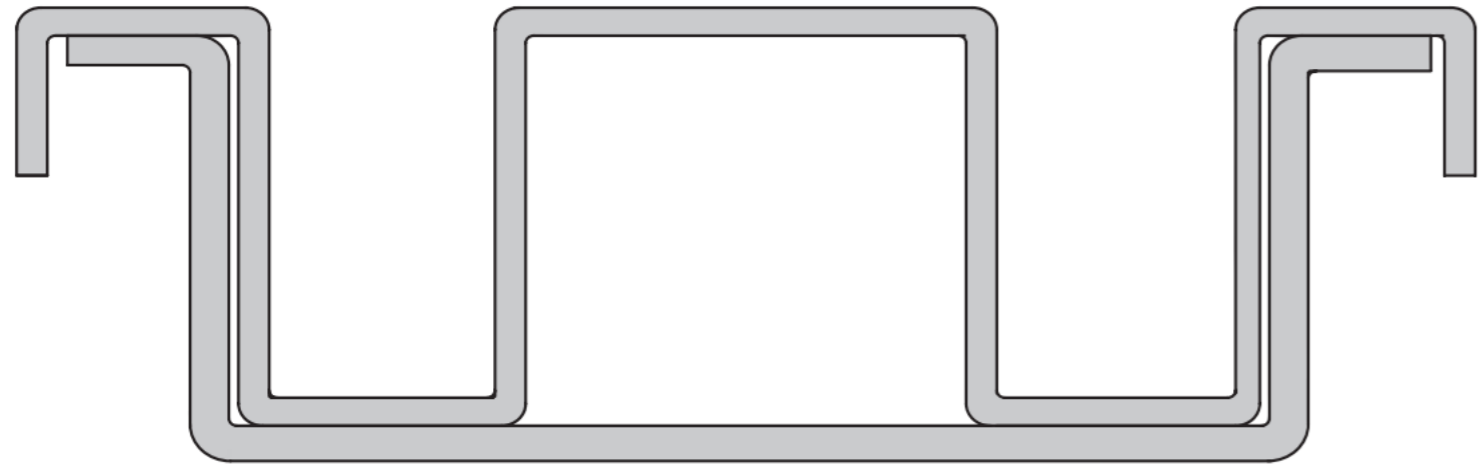

Steel &
St.St



Reinforced
Steel




Solid Steel &
St.St



Heated Sill



Dust Holes



Total Weight: 3600 kgs



Load in Support point: 900 kgs



Heated Sill



Dust Holes




Total Weight: kgs




Load in Support point: kgs



Heated Sill



Dust Holes



Total Weight: >4800 kgs



Load in Support point: >1200 kgs

*Recommended use. The specified values are about the weight that the sills can support, on their weakest points (excluding their support).The recommended weight do not exercise any elastic deformation on the sill

*The total loadings is divided in four points

GET IN TOUCH

KLEFER SA
Business Park,
Kilkis,
61 100, Greece

PHONE

+30 2341075730

EMAIL

commercial@klefer.com

WEBSITE

www.klefer.com

