


K L E F E R

Sill

Whether it is a cargo lift or a passenger elevator, KLEFER offers tailored solutions in terms of sill use, to meet your demands. Made of durable materials such as stainless steel, aluminum, or solid steel KLEFER sill options are designed to endure constant use and withstand the rigors of daily traffic.

Contact us today, to discuss your specific requirements.

50/11 PM Slim cabin doors

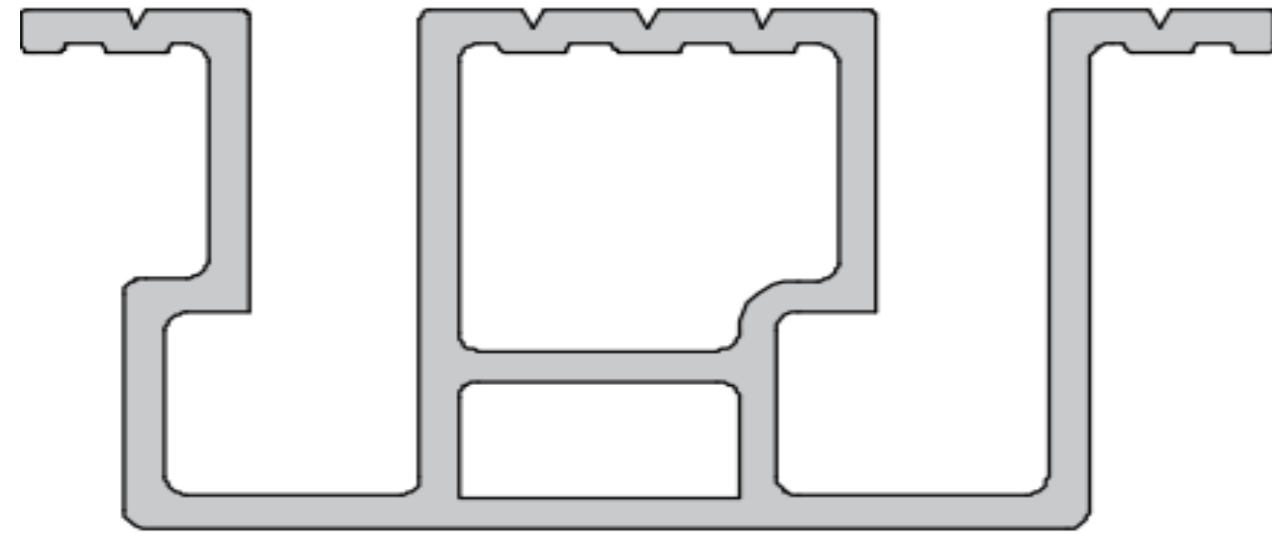

Aluminum



Heated Sill



Dust Holes



Total Weight: 1200 kgs



Load in Support point: 300 kgs



Reinforced Aluminum



Heated Sill*




Dust Holes



Total Weight: 4800 kgs



Load in Support point: 1200 kgs

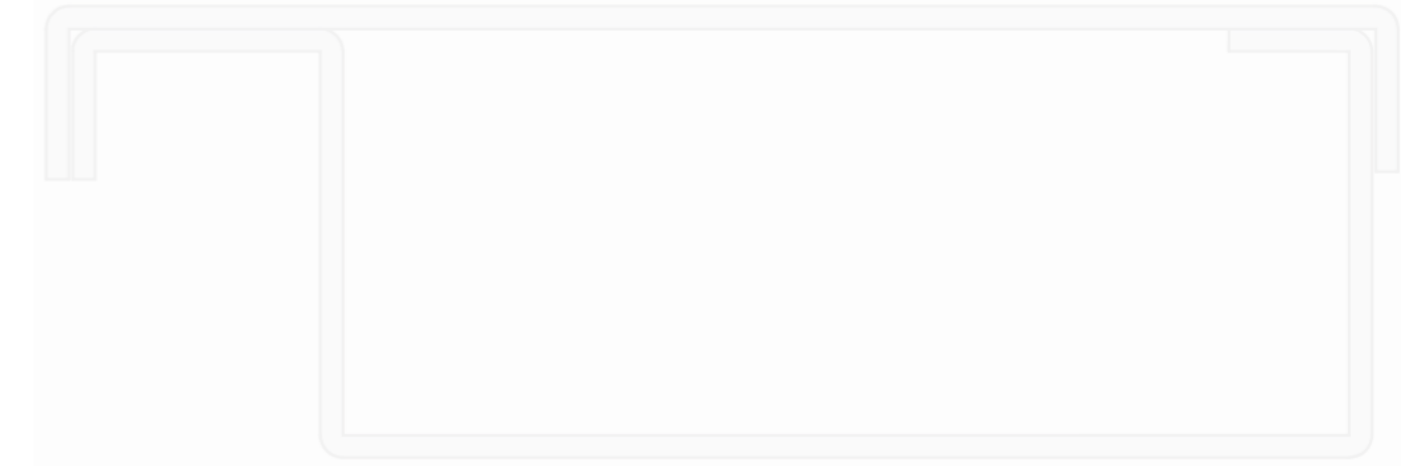

Concealed



Heated Sill



Dust Holes



Total Weight: 1200 kgs




Load in Support point: 300 kgs

*Not available for c2

*Recommended use. The specified values are about the weight that the sills can support, on their weakest points (excluding their support).The recommended weight do not exercise any elastic deformation on the sill

*The total loadings is divided in four points


50/11 PM Slim cabin doors

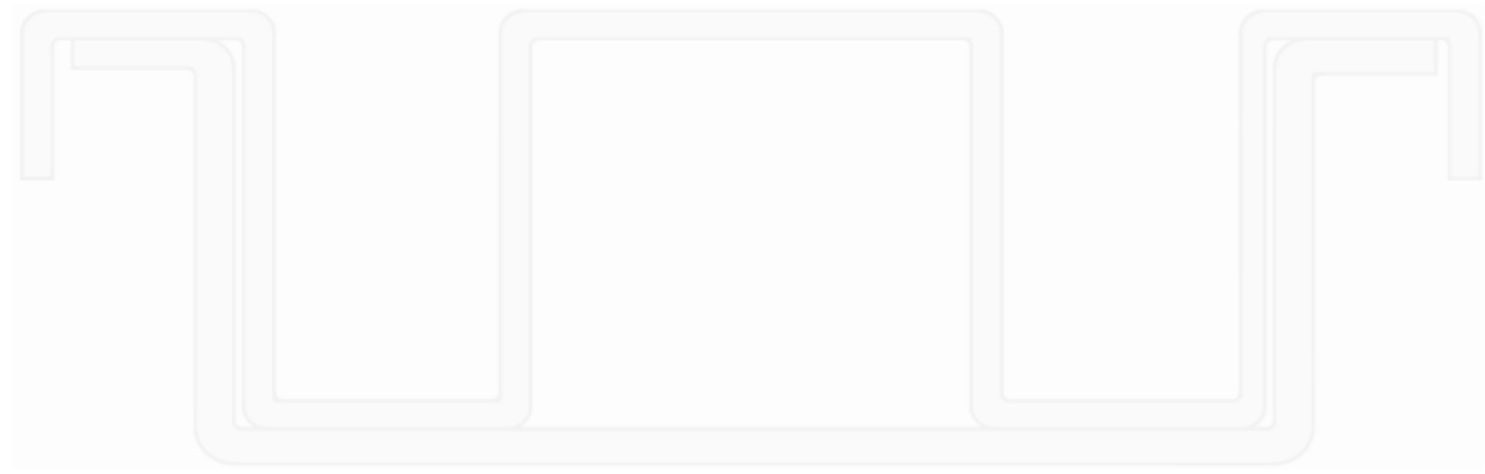

Steel &
St.St



Reinforced
Steel

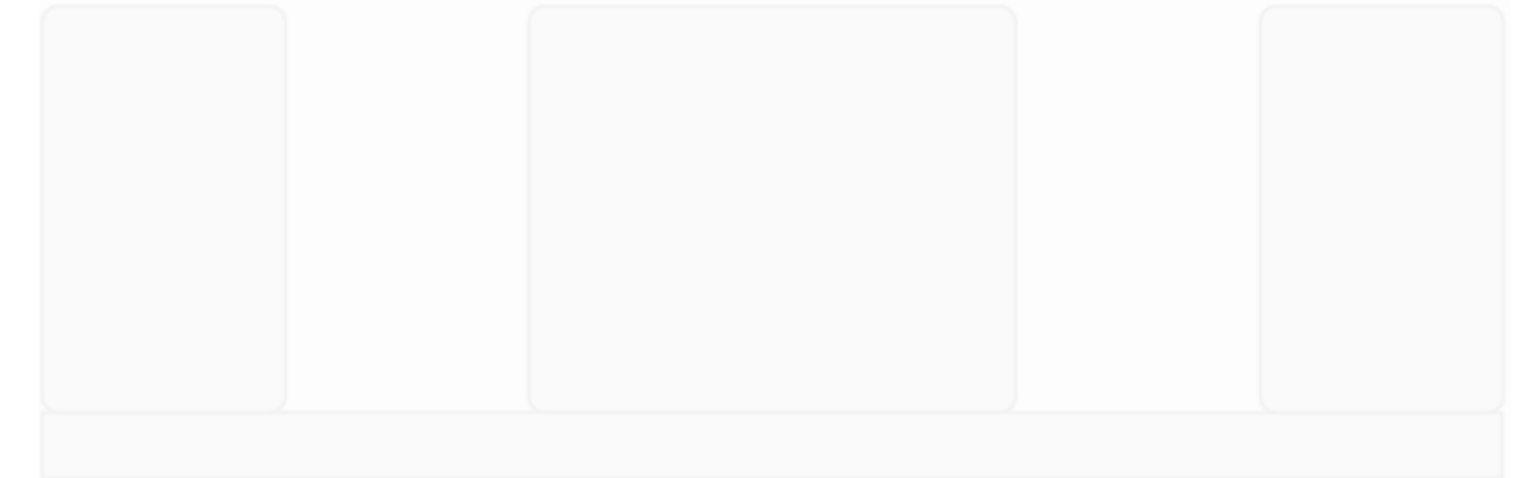

Solid & St.St
Steel



Heated Sill



Dust Holes



Total Weight: 3600 kgs



Load in Support point: 900 kgs



Heated Sill



Dust Holes



Total Weight: 3600 kgs



Load in Support point: 900 kgs



Heated Sill



Dust Holes



Total Weight: >4800 kgs



Load in Support point: >1200 kgs

*Recommended use. The specified values are about the weight that the sills can support, on their weakest points (excluding their support).The recommended weight do not exercise any elastic deformation on the sill

*The total loadings is divided in four points

GET IN TOUCH

KLEFER SA
Business Park,

Kilkis,
61 100, Greece

PHONE

+30 2341075730

EMAIL

commercial@klefer.com

WEBSITE

www.klefer.com

